


1 SATA 4ch AHD (Analog HD) DVR



- ✦ Support AHD cameras front-end non-real-time encoding;
- ✦ Support VGA, HDMI HD output;
- ✦ Support XM Cloud technology, easy to achieve a variety of network penetration, one step to remote monitoring, getting rid of various complicated network settings, easy and simple to operate;
- ✦ Support various mobile monitoring: (IOS, Windows Mobile, BlackBerry, Symbian, Android) .
- ✦ Support multiple web browsers (IE、Chrome、Firefox、Safari);
- ✦ Support more than 20 languages (English、Finnish, French, German, Greek, Italian, Japanese, Polish, Portuguese, Russian, Spanish, Thai, Chinese, Traditional Chinese, Turkish, etc.) , no nation boundaries; perfect protection circuit, unique triple watchdog function
- ✦ Supporting web, CMS, center platform management software MYEYE, provide SDK development.

FST-AH41K5		
System	Main processor	Huawei Hass XM610
Video	video compression	H.264(High Profile);
	Encode	4*AHD*12fps
	Decode	4*AHD@12fps
	Multi-mode	Pure Analog: 4*AHD; 4*D1;
	input	Mixed: 2*D1(analog) +1*720P (network) +1* AHD (network)
		Pure Network: 1*1080P; 1*720P+3*D1
Audio	Audio compression	G.711A
	Intercom	support
Recording and Playback	Record mode	Manual>alarm>motion detection>timing
	Playback Channels	4 (pure local input mode)
Storage and backup	Space occupation	960H: 12~20G/ day*channel
		720P: 20G~30G/ day*channel
		audio: 691.2M/ day*channel
	Backup mode	Network backup、USB HDD, USB writer、SATA writer
Interface	Video input	4 BNC
	Video output	1ch VGA,1ch HDMI,1ch TV
	Audio input	4ch RCA
	Audio output	1ch RCA
	Network interface	RJ45 10M/100M Adaptive Ethernet port
	PTZ control	RS485; support multiple PTZ protocols
	USB	2 USB ports
	Hard disk	1 SATA (Each maximum support 4T)

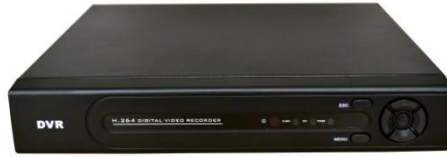

ForeSight

Email: sales@foresight-systech.com
www.foresight-systech.com

	Wireless	3G、WIFI(expand via USB)
Other	Power	12V/2A
	dimension	255mm(length)* 225mm(width)* 45mm(height)