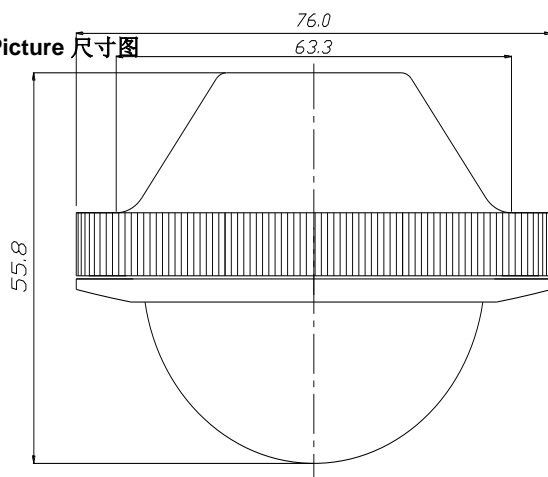


Vehicle IR Day/Night Mini Metal Dome Camera

汽车红外夜视迷你金属半球摄像机


Features:

- Vehicle (IR Day/Night) Mini Metal Dor
- 1/3" SONY Color SuperHAD II Low Lu
- Resolution : 550TVL,650TVL,700TVL
- Lens Optional : 2.5/2.8/3.6/6.0/8.0mm
- IP67 Water-proof & Vandal-proof housing,resistant to water burst cleaning process
- Angle Adjustment with adaptor 0°, 15°, 25°for optional
- Easy Installation Mechanical Design
- 10 leds, vision range 10m(Optional)
- Housing can be with Audio(Optional)
- Dimension: L100xW65xH68(mm)

Dimension Picture 尺寸图

Specifications技术参数

Model 型号	FST-DF5B4	FST-DF6B4	FST-DF7B4
	FST-DF5LB4	FST-DF6LB4	FST-DF7LB4
Pick up Device 摄像元件	1/3" SONY Color SuperHAD II Low Lux CCD		
Signal Format 讯号系统	PAL or NTSC (color)		
Picture Elements 像元素	PAL:752(H)x582(V); NTSC:768(H)x494(V)		PAL:976(H)x582(V); NTSC:976(H)x494(V)
Horizontal Resolution 水平解析度	550TVL	650TVL	700TVL
Sensitivity 最低照明度	0 Lux(Infrared LED On,at F1.2)-CM8AR / 0.05 Lux at F=1.2-CM8A		
Infrared LED 红外灯	10 Leds-Optional		
Infrared LED Range 夜视范围	10m-optional		
Scanning System 扫描方式	PAL:625 TVL; NTSC:525TVL 2:1 Interlace		
Synchronization 同步系统	Internal sync.		
Infrared Spectrum 红外感应光波	850nm		
S/N Ratio 视频信噪比	Over 50dB(AGC off)		
Auto Gain Control 自动增益	Auto		
White Balance 白平衡	Auto		
Electronic Shutter 电子快门	Auto		
Back Light Compensation 背光补偿	Auto		
Video Output 视频输出	1 Vp-p,75ΩComposite ,BNCx1		
Audio Output 音频输出	Optional		
Mirror 镜像功能	Optional		
Gamma Ratio 灰度比	0.45		
Auto-iris Lens Control 自动光圈	N/A		
Lens 镜头	f2.5mm~12mm		
Lens Mount 镜头安装	M12xP0.5mm Thread		
Exterior Focus Adjustment 外部调焦	N/A		
Pan Adjusting 水平调节	+/-180 Degree		
Tilt Adjusting 垂直调节	0-62 Degree		
Power Supply 工作电压	12V DC ±10%, ø 2.0mm DC Jack x1		
Power Consumption 工作电流	150mA(with Leds) / 70mA(without Leds)		
Dimensions 外型尺寸	73 x 57.3 mm		
Net Weight 产品重量	176g		
Weatherproof/Waterproof 防水性能	Weatherproof (IP67) without Audio		
Operating Temperature 工作温度	-10°C to +50°C		

*Specifications are subject to change without prior notice